


Application	Process Cooling
Problem	Original basin had inlet boot entering through inboard side, creating poor water flow and resulting in uneven water distribution and dry portions of fill.
Solution	Marley replacement hot water basin with standard top inlet design and flume steadies and equalizes water for uniform distribution across heat transfer fill.
Results	Extended tower life; enhanced performance.

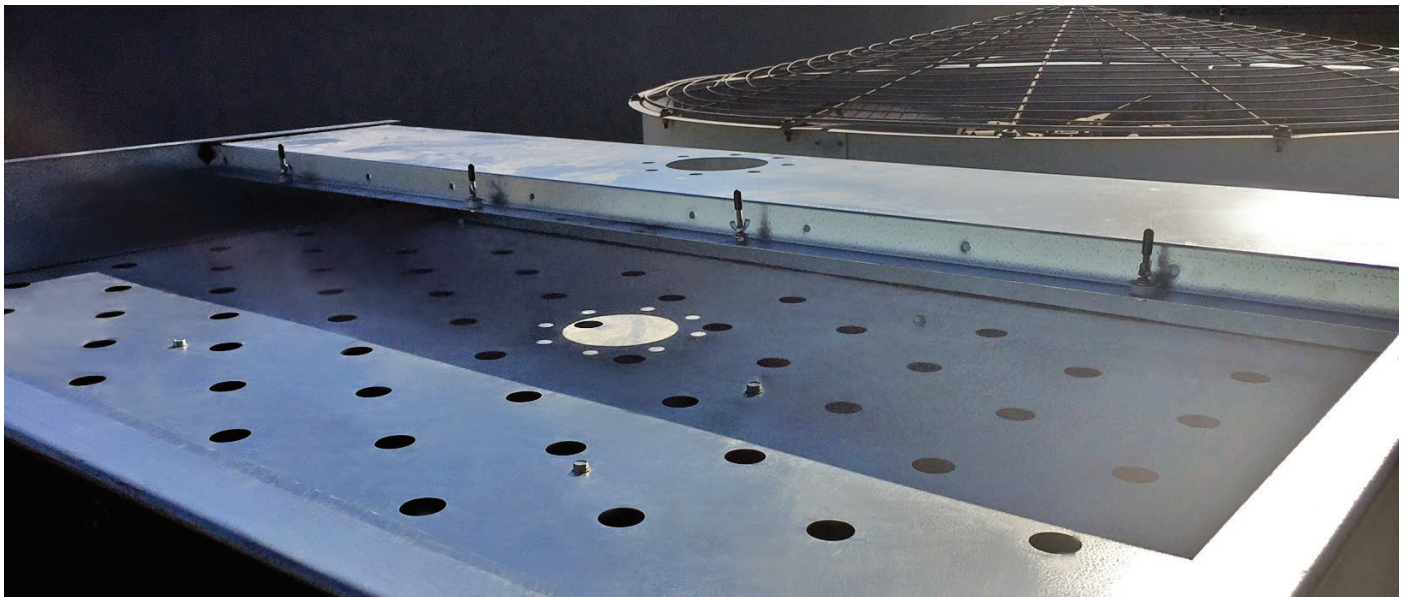

Contact your Marley representative to identify parts for other manufacturers' towers: spxcooling.com/relocator

SPX COOLING TECHNOLOGIES, INC.

7401 WEST 129 STREET
OVERLAND PARK, KS 66213 USA
913 664 7400 | spxcooling@spx.com
spxcooling.com

CCS-HWB-17 | ISSUED 08/2017
COPYRIGHT © 2017 SPX CORPORATION

In the interest of technological progress, all products are subject to design and/or material change without notice.

