

Recold Evaporative Condenser INSIGHT

Overview

Recold evaporative condensers can help improve your refrigeration system over air-cooled condensers by having:

- Up to 50% less energy usage
- Annual cost savings that can be greater than the price of the condenser
- System benefits like less refrigerant charge, reduced rack and electrical service costs, and extended compressor life

...and this in regions outside the southwest!




Detail – Low Operating Cost

- Compressor and condenser energy usage can be reduced up to 51%, translating into as much as \$35,000 in annual operating cost savings

Because...

- Evaporative cooling can provide significantly lower condensing temperatures than achievable with “air cooled” or “dry” heat rejection devices
- Reaching lower condensing temperatures allows evaporative devices to transfer heat more efficiently, using less electrical energy

Estimated Annual Compressor and Condenser Energy Cost

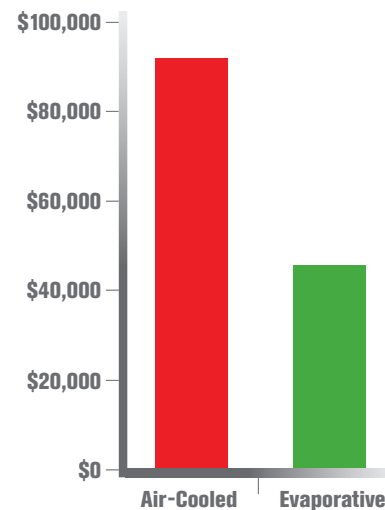

Total Low and Medium Temperature	Air-Cooled	Evaporative	Delta
Installed Compressor and Condenser Power (hp)	175.1	132.4	-24%
Annual Energy Use (kWh)	1,030,687	502,752	-51%
Annual Energy Cost	\$92,762	\$45,246	-\$47,516
Annual Water Usage, Serwer, Maintenance Costs	---	---	\$11,844
Annual Operating Cost	---	---	-\$35,672

Note: Energy usage estimates based on industry recognized energy analysis software. Water usage estimates based on typical operating parameters, cost varies by municipality. See system detail on following page.

Evaporative Condenser INSIGHT

Detail – System Benefits

- Lower condensing temperatures can lower compression ratio as much as 23%, extending compressor life
- Up to 24% less total installed condenser and compressor power, reducing rack and electrical service costs
- Evaporative heat transfer can lower refrigerant charge by as much as 100 lbs

Calculation Detail

Estimates based on simulated annual operation of a 40,000 ft² supermarket refrigeration system in Miami, FL. Contact Recold for information specific to your site.

Evaluation Parameter	Low-Temperature Summary			Medium-Temperature Summary		
	Air-Cooled	Evaporative	Delta	Air-Cooled	Evaporative	Delta
Refrigerant	R-404A	R-404A	---	R-404A	R-404A	---
Capacity (Btu/hr)	303,500	306,000	---	555,000	551,000	---
Suction Temperature (°F)	-20	-20	---	+20	+20	---
Condensing Temperature (°F)	110	95	-15	115	95	-20
Dry Bulb / Wet Bulb Temperature (°F)	100	80	-20	100	80	-20
Rate Compressor Power (hp)	73.6	60.6	-18%	83.5	59.8	-28%
Compression Ratio	8.98	7.33	-18%	4.33	3.32	-23%
Rated Condenser Power (hp)*	9	6	-33%	9	6	-33%
Annual Energy Use (kWh)	525,376	272,223	-48%	505,311	230,519	-55%
Annual Energy Cost (\$)	\$47,284	\$24,501	-\$22,783	\$45,478	\$20,745	-\$24,733

*Evaporative condenser rated power includes a 10 hp fan motor and 2 hp pump motor. One unit is used for both low and medium temperature systems; multiple loads are easily separated in a Recold Evaporative Condenser.

Recold Evaporative Condensers

- Low-profile forced-draft or induced-draft
- 294 to 7644 MBH Capacity
- Corrosion-resistant copper coils
- Proven redundancy options
- Time saving maintenance access features
- Easy to install, factory wired and tested
- Made in the USA

Key Contacts

- Southeast Refrigeration Sales:
george.varzaly@spx.com 770-982-2121
- Refrigeration Applications:
mike.lloyd@spx.com 714-482-4314
- HVAC Applications:
jon.walker@spx.com 714-482-4328

Recold has manufactured heat exchange equipment serving Refrigeration, HVAC, and Industrial applications for over 75 years. For the best value in heat rejection, insist on a Recold Evaporative Condenser.



7401 WEST 129 STREET | OVERLAND PARK, KANSAS 66213 UNITED STATES | 913 664 7400 | spxcooling@spx.com | spxcooling.com

Contact your Marley Sales Representative at spxcooling.com/en/sales/

In the interest of technological progress, all products are subject to design and/or material change without notice.
©2011 SPX Cooling Technologies, Inc. | Printed in USA