

# DT fluid cooler

AERO-X COIL TECHNOLOGY • HIGHER DRY OPERATION FLEXIBILITY

MARLEY®



# DT fluid cooler

INDUCED-DRAFT • CLOSED-CIRCUIT

## Higher Performance. Higher Dry Switchpoint.

An induced-draft, coil only closed-circuit cooling tower, the Marley DT Fluid Cooler with Aero-X™ coil technology provides dry operation flexibility that fill/coil hybrid coolers cannot.

### Aero-X Coil Technology Maximizes Thermal Capacity Per Coil Row\*

The lowest air-side pressure drop (up to 10% more airflow at the same fan HP) and higher heat rejection capacity per coil row – benefits realized with the DT Fluid Cooler's Aero-X coil technology – provide opportunities to reduce equipment size and/or lower energy consumption, while maintaining the dry operation flexibility that coil only closed-circuit coolers are known for.

### Higher Dry Switch Point – Up To 10°F + Higher\*

Whether the motivation for seasonal dry operation is to reduce site water usage, minimize water treatment costs or simplify operation in freezing conditions, higher dry switch point temperatures enable achievement of those objectives a larger portion of the year. With up to 10°F + higher dry switch point, the DT Fluid Cooler may enable up to 15-20% incremental annual hours in dry mode. Annual water savings per cooling ton of 3,000 gallons/ton and \$40/ton are achievable in many areas, depending on climate conditions. Optional finned coils further enhance dry operation capability at higher ambient temperatures.

\*vs other conventional *coil only* evaporative fluid coolers




### Lower Fluid Pressure Drop – Up To 30%

Reduced pumping energy requirements compared to the previous generation positively impact system operating cost and energy consumption.

## Broad Product Selection

Choose from DT models in a wide range of sizes and layouts to meet your specific cooling requirements.

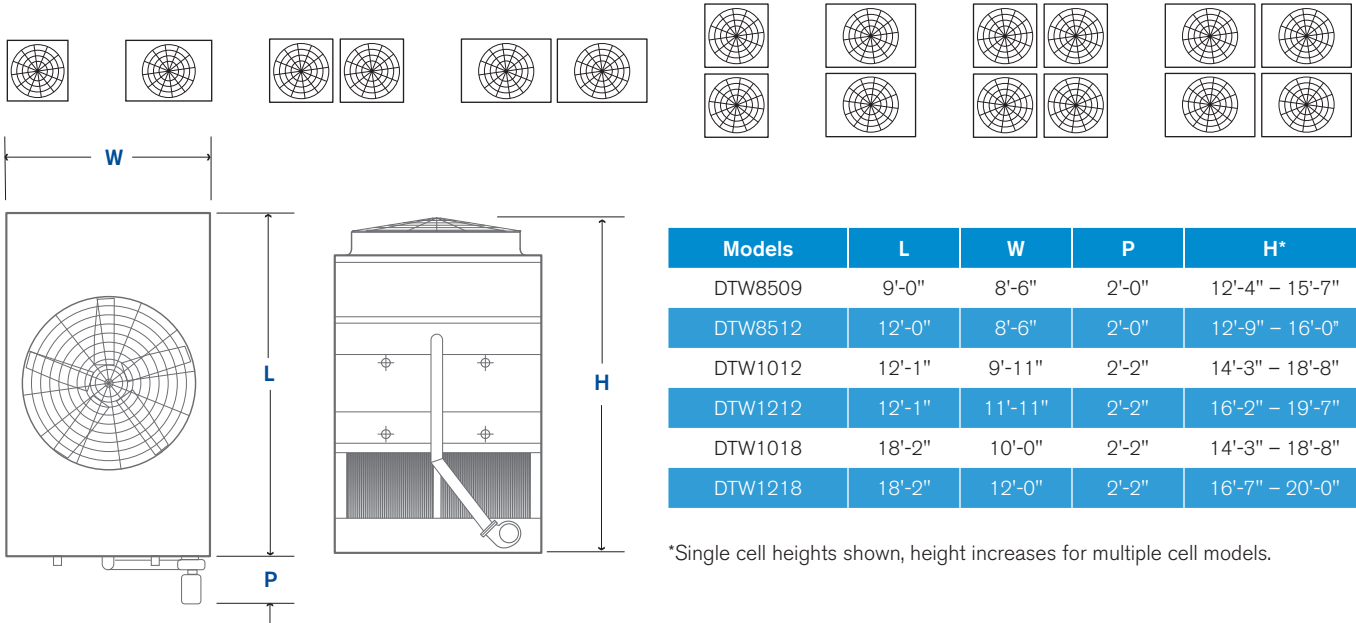

## Value – Added Construction Details

### MARLEY GEAREDUCER® DRIVE

Genuine Marley mechanical system offers low maintenance costs and reliable performance with 5-year warranty. Belt drive optional.

### CLOG-RESISTANT SPRAY SYSTEM

Large orifice spray nozzles help prevent debris build-up and clogging.

### TRIPLE-PASS AIR INLET LOUVERS

Removable louvers incorporate three changes in direction to control splash out and sunlight exposure to limit algae growth.

## Marley Reliability

Heavy-duty construction, galvanized and stainless steel material options, high-performance design and our five-year mechanical warranty ensure consistent cooling over a wide range of closed-circuit cooling applications.



## IS THE MARLEY DT RIGHT FOR YOUR APPLICATION?



Find out at [spxcooling.com/coolspec](http://spxcooling.com/coolspec)

## ADDITIONAL DT FLUID COOLER INFORMATION

For further information about the DT Fluid Cooler – including engineering schematics, data, layout requirements and more – download at [spxcooling.com](http://spxcooling.com)



Engineering Data and Specifications

## OTHER SPX COOLING PRODUCTS

SPX Cooling offers a full line of industry leading products – with unmatched support and innovation designed to help you get the most out of your cooling process. Take a look at these and other cooling products at [spxcooling.com](http://spxcooling.com).



Marley MH Fluid Cooler



Marley LW Fluid Cooler



Recold JW Fluid Cooler



Marley NC Cooling Tower

## SPX COOLING TECH, LLC

7401 WEST 129 STREET  
OVERLAND PARK, KS 66213 USA  
913 664 7400 | [spxcooling@spx.com](mailto:spxcooling@spx.com)  
[spxcooling.com](http://spxcooling.com)

DT-22 | ISSUED 03/2022

©2016-2022 SPX COOLING TECH, LLC | ALL RIGHTS RESERVED  
In the interest of technological progress, all products are subject to design and/or material change without notice.

