

Overview

QuickAssist makes installation of inlet pipes and valves on Marley® NC Cooling Towers faster and easier.

Primary Benefits

- Holds inlet piping connection nuts in position inside distribution basin
- Enables fast and easy attachment of inlet piping bolts
- Eliminates the need to remove basin covers and inlet flume
- Reduces installation time up to 3 hours

Benefit Detail


An Extra Set of Hands:

QuickAssist is a factory-installed ring/rectangle with integral nuts welded to the underside of the hot water basin piping inlet on Marley NC Cooling Towers. Before QuickAssist, installers were required to remove inlet basin covers and flumes, and reach underneath the remaining panels to tighten nuts on pipes or valves being installed onsite.

Now, no covers or flumes need to be removed and bolts can be fastened quickly from above. Eliminating the need for removal of basin covers and inlet flumes can help to reduce installation time by as much as three (3) hours, limiting downtime and labor – and the costs associated with the two.

Availability

- Standard feature on Marley NC models
 - Single inlet option (SIO) hot water basin connections
 - ANSI 125 basic pipe connections
 - HC valve connections
- Material will match selected hot water basins construction
 - Heavy mill galvanized carbon steel
 - S300, S304 or S316 stainless steel

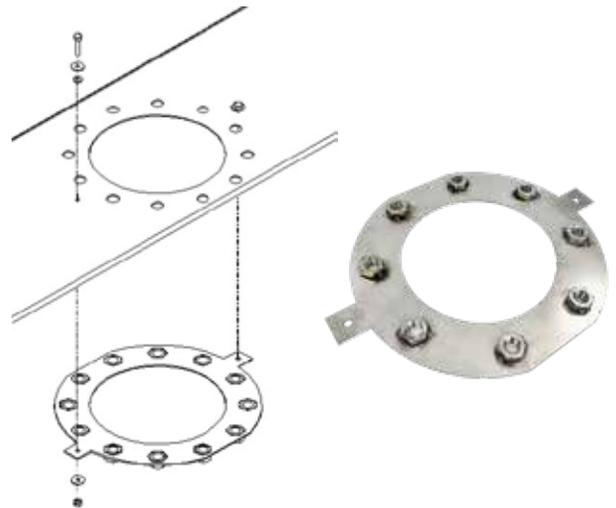

SPX COOLING TECHNOLOGIES, INC.

7401 WEST 129 STREET
OVERLAND PARK, KS 66213 USA
913 664 7400 | spxcooling@spx.com
spxcooling.com

IN-QA-22 | ISSUED 07/2022

©2022 SPX COOLING TECHNOLOGIES, INC. ALL RIGHTS RESERVED.

In the interest of technological progress, all products are subject to design and/or material change without notice.