

CP cooling tower

DESIGNED FOR SPACE AND SOUND-SENSITIVE APPLICATIONS.

MARLEY® 



QUIET AND COMPACT

- Counterflow design addresses space and sound challenges
- Low-sound fan standard

ROBUST MATERIALS

- FRP outer structure
- Steel internal substructure

HSG274 AND 42.BIMSCHV COMPLIANT:


Air inlet louvers contain water and shade basin area to discourage microbial growth

FLEXIBLE CONSTRUCTION


Available fully assembled or in modules for field assembly

BROAD CONFIGURATIONS


- 13 box sizes
- Cooling range: 48-1865 m³/hr

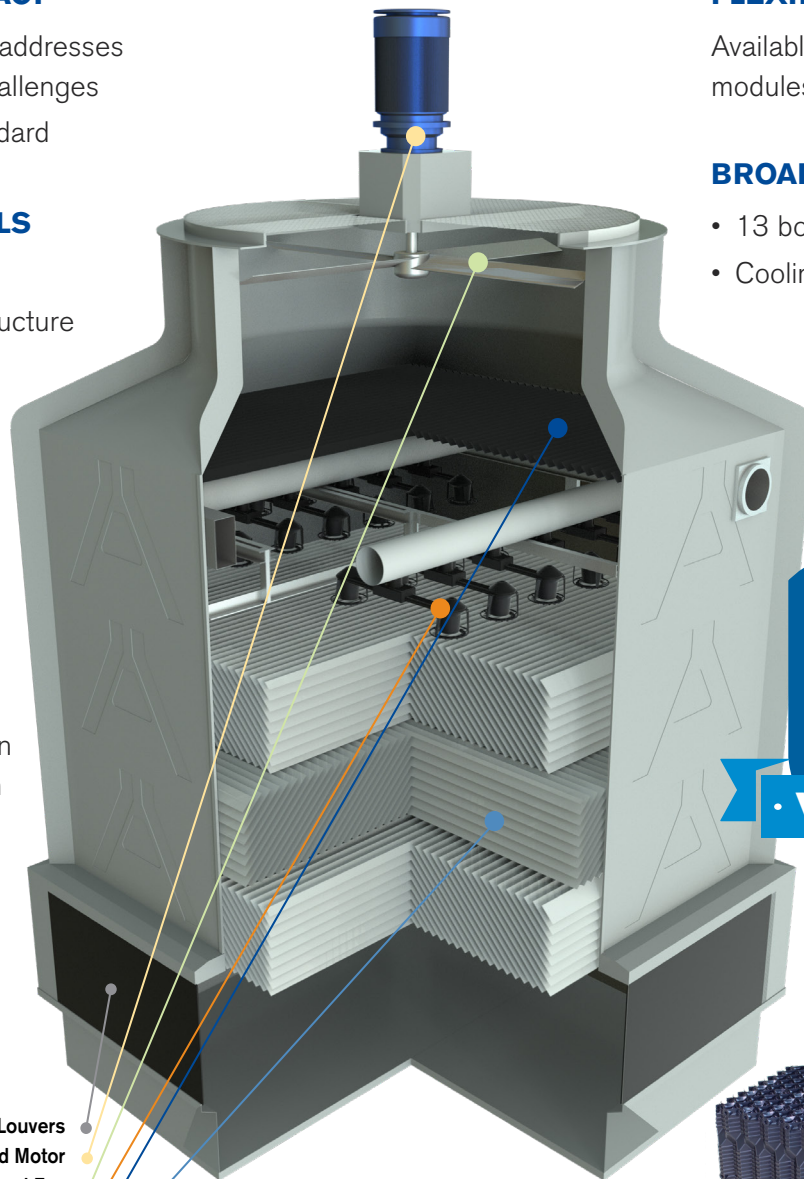

- Honeycomb Louvers
- Gear Motor
- Low-Sound Fan
- Low Pressure Distribution System
- Drift Eliminators
- High Efficiency Fill



High-efficiency PVC/PP film fill



Clog-resistant PE/PP splash fill

FILL OPTIONS

For water quality ranging from clean to very dirty

SPX COOLING TECHNOLOGIES UK LTD

3 KNIGHTSBRIDGE PARK, WAINWRIGHT ROAD
 WORCESTER WR4 9FA UK
 +44 1905 750 270 | ct.fap.emea@spx.com
 spxcooling.com

uk_CP-FS-19 | ISSUED 03/2019

©2019 SPX COOLING TECHNOLOGIES, INC. ALL RIGHTS RESERVED.

In the interest of technological progress, all products are subject to design and/or material change without notice.

